SHEET SIZE: 24" X 36"

LABYRINTH PLAN

Slope to drain, verify slope direction or drainage design in field

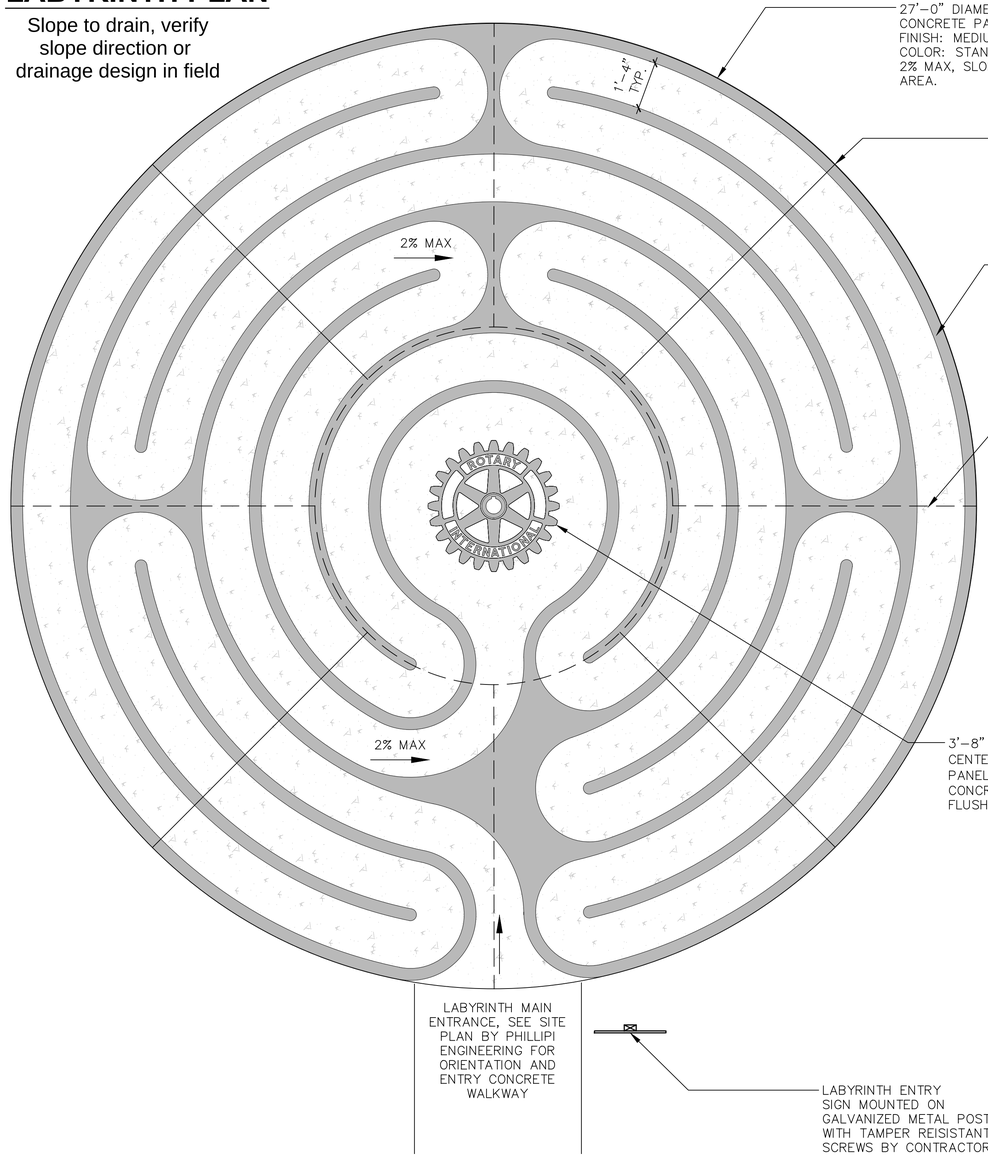

27'–0" DIAMETER PEDESTRIAN CONCRETE PAD FOR LABYRINTH.
FINISH: MEDIUM BROOM
COLOR: STANDARD GREY OR YOUR PREFERENCE
2% MAX, SLOPE TO DRAIN TO ADJACENT PLANTING AREA.

SAWCUT SCORE JOINT, TYPICAL 10'–0" O.C. MAX

4" WIDE LABYRINTH STRIPING, EXTERIOR RATED PAINT BY ANY MAJOR PAINT BRAND
COLOR: YOUR PREFERENCE

3/8" EXPANSION JOINT WITH APSHALTIC FIBER JOINT FILLER AND GREY ELASTOMERIC SEALANT TYPICAL, 20'–0" O.C. MAX

CAD FILE CAN BE PROVIDED TO CONTRACTOR UPON REQUEST FOR STAKING AND LAYOUT

3'–8" DIAMETER ROTARY INTERNATIONAL LOGO. CENTERED ON SLAB. 1/4" THICK STAINLESS STEEL PANEL WITH 1/2" SS BOLTS WELDED TO REAR OF PANEL FOR CONCRETE EMBEDMENT, POSITIVE CUT. INSTALL TOP OF METAL FLUSH WITH ADJACENT CONCRETE.

LABYRINTH MAIN ENTRANCE, SEE SITE PLAN BY PHILLIPI ENGINEERING FOR ORIENTATION AND ENTRY CONCRETE WALKWAY

LABYRINTH ENTRY SIGN MOUNTED ON GALVANIZED METAL POST WITH TAMPER REISISTANT SCREWS BY CONTRACTOR.

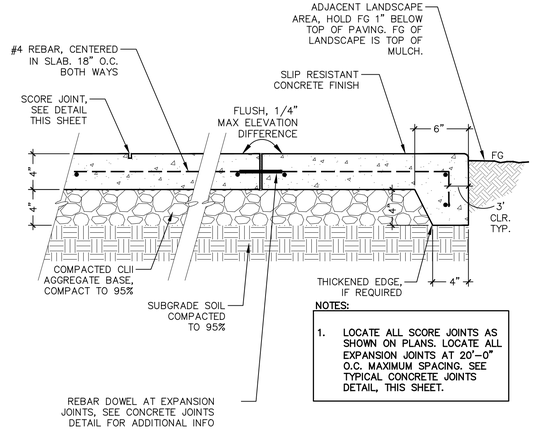

NOTES:

1. LOCATE ALL SCORE JOINTS AS SHOWN ON PLANS. LOCATE ALL EXPANSION JOINTS AT 20'–0" O.C. MAXIMUM SPACING. SEE TYPICAL CONCRETE JOINTS DETAIL, THIS SHEET.

1 PEDESTRIAN CONCRETE PAVING
NTS

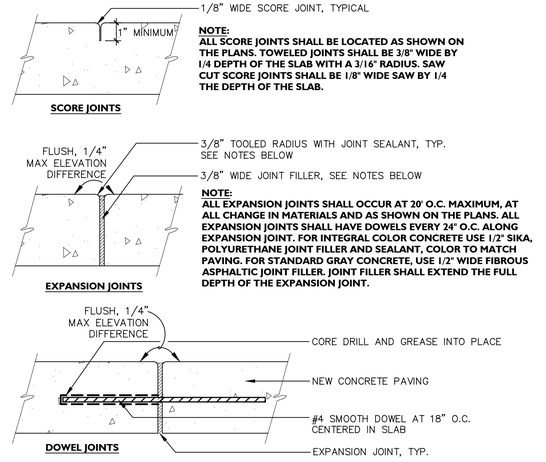

NOTE:
ALL SCORE JOINTS SHALL BE LOCATED AS SHOWN ON THE PLANS. TOWELED JOINTS SHALL BE 3/8" WIDE BY 1/4 DEPTH OF THE SLAB WITH A 3/16" RADIUS. SAW CUT SCORE JOINTS SHALL BE 1/8" WIDE SAW BY 1/4 THE DEPTH OF THE SLAB.

NOTE:
ALL EXPANSION JOINTS SHALL OCCUR AT 20' O.C. MAXIMUM, AT ALL CHANGE IN MATERIALS AND AS SHOWN ON THE PLANS. ALL EXPANSION JOINTS SHALL HAVE DOWELS EVERY 24" O.C. ALONG EXPANSION JOINT. FOR INTEGRAL COLOR CONCRETE USE 1/2" SIKA, POLYURETHANE JOINT FILLER AND SEALANT, COLOR TO MATCH PAVING. FOR STANDARD GRAY CONCRETE, USE 1/2" WIDE FIBROUS ASPHALTIC JOINT FILLER. JOINT FILLER SHALL EXTEND THE FULL DEPTH OF THE EXPANSION JOINT.

2 TYPICAL CONCRETE JOINTS
NTS

ROTARY LOGO ENLARGEMENT

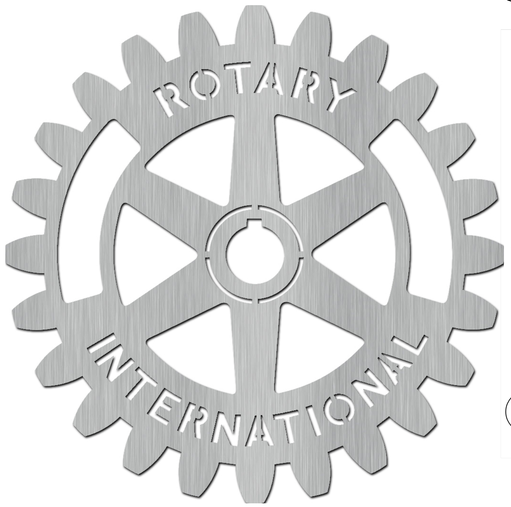

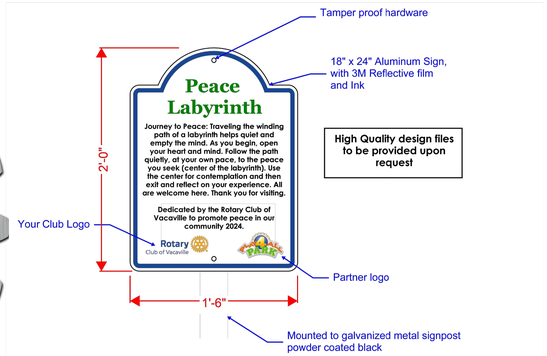

High Quality design files to be provided upon request

3 LABYRINTH ENTRY SIGN
NTS

CONCEPT IMAGERY (SIMILAR)

PINS WELDED TO REAR OF PANEL, TYP.

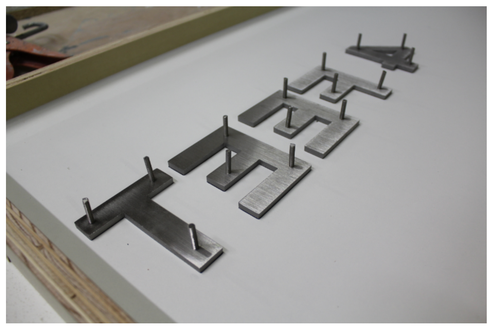

DIAL TOLL FREE
1-800-642-2444
AT LEAST TWO DAYS BEFORE YOU DIG
UNDERGROUND SERVICE ALERT OF NORTHERN CALIFORNIA

SAMPLE CONCRETE LABYRINTH PLAN

EXAMPLE - VERIFY IN FIELD

DESCRIPTION:	DATE:

DRAWING SCALE: 1/2" = 1'–0"
INCH INCREMENTS ARE SHOWN AT FULL SCALE ON ORIGINAL DRAWING. IF NOT ACCURATE, ADJUST SCALE ACCORDINGLY. VERIFY BEFORE SCALING.

0 1' 2' 4'
0 1/2" 1" 2"